HYDRAULIC BEAVERTAIL

Heavyweight transport trailer

STANDARD SPEC

8ft beavertail Rear spool block **Rear beavertail ram locks Durbar floor**

OPTIONAL EXTRAS

High speed axles (per axle) - £350.00 Air/oil, twin line braking - £1235.00 ABS with air brakes - £2540.00 Hydraulic load sensing valve - £685.00 Mud flaps - £425.00 Flashing beacon - £145.00 Adjustable sprung drawbar - £1330.00 Side boards (on top of the bed) – £740.00 Side rails (lower) - £255.00 Side lockable toolbox (steel) - £295.00

Side lockable toolbox (plastic) - £155.00 Alterations to std. body sizes - £255 pft Front/Rear rake (per unit) - £390.00 Rear round bale rake - £390.00 Hydraulic box compressor - £680.00 Rachet strap rail (under bed) - £155.00 Heavy duty lashing points - £250.00 Timber floor keruing - £32.00 pft Half timber half durbar floor - £32.00 pft 4 retractable load locks - £510.00

DIMENSIONS

HMBV 22 HMBV 20

ed Length	9760mm (32ft)	9760mm (32ft)	9150m
eaver Tail	2440mm (8ft)	2440mm (8ft)	2440m
verall Length	11285mm (37ft)	11285mm (37ft)	10675n
/idth	2500mm (8ft 2in)	2500mm (8ft 2in)	2500m
ide Height	900mm (2ft 11in)	900mm (2ft 11in)	900mm
arrying Capacity	22 T	20 T	14 T
loor Type	Durbar	Durbar	Durba
hassis	250 x 150 box	250 x 150 box	250 x 1
ide Rails	150 x 75mm	150 x 75mm	150 x 7
xle Size	3 x 90mm square	3 x 90mm square	2 x 90n
rake Size (axle type)	400 x 80 ag sp	300 x 90 ag sp	300 x 9

01277 899 604 info@hmtrailers.co.uk

Shallow load angle


bale trailer

caught on


Doubles as a low loader and

No rear overhang to get

£20,552.00 £19,829.00 £16,582.00

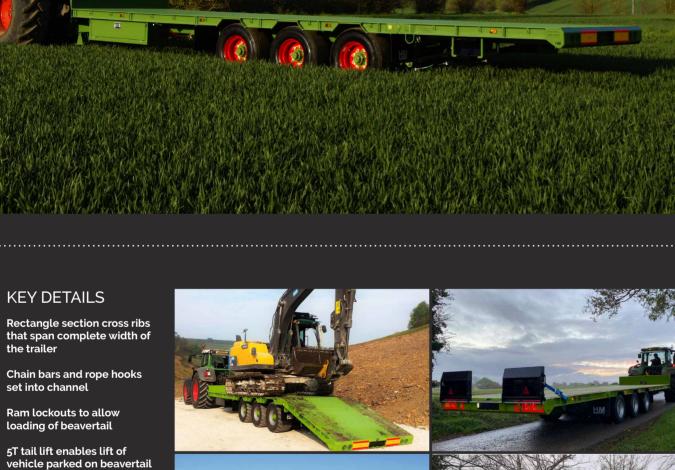



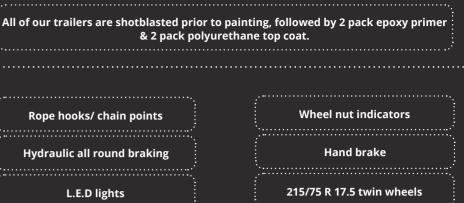

Side marker lights (compulsory for trailers over 9m in length) - £275.00 Demountable water tanks - **£POA** Custom colour - £650.00 Passive steering axle - £2320.00 Forced steering rear axle incl steering control - £398 Central tyre inflation system - pg 35 Full selection of wheels & tyres - pg 34

HMBV14

m (30ft) m (8ft) nm (35ft) m (8ft 2in) n (2ft 11in)

150 box /5mm nm square 90 ag sp

